



General Overview & Indicative Typical sketch

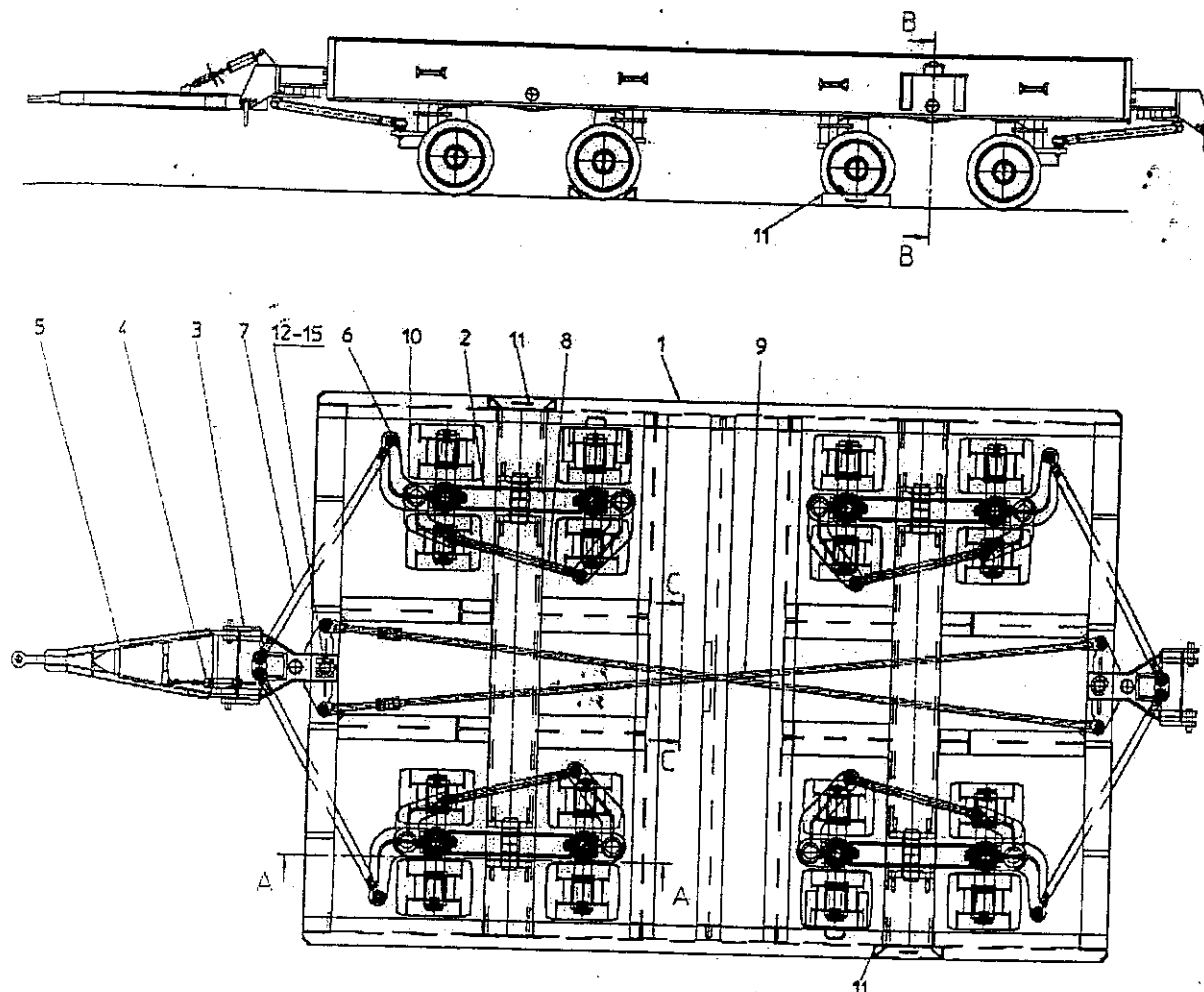


Position	Description	Position	Description
1	Frame	12	Bolt for steering head d=80
2	Rocker beam	13	Axle guard
3	Steering head	14	Hexagonal screw
4	Drawbar height adjustment	15	Washer
5	Drawbar	16	Bolt for rocker beam
5.1	Drawbar eye	17	Washer
6	Arrangement of steering arms	18	Axle guard
7	Steering track rod EL=1836	19	Hexagonal screw M20*50
8	Steering track rod EL=990	20	Washer A21
9	Steering linkage EL=5801	21	Greasing nipple AM10*1
9.1	Joint bearing GE45 UK-2RS	22	Support for steering linkage-wood
10	Wheel set 559*406	23	Hexagonal screw M12*100
11	Wheel chock	24	Washer A12,5
11.1	Chain	25	Locking nut M12


Schnitt A-A

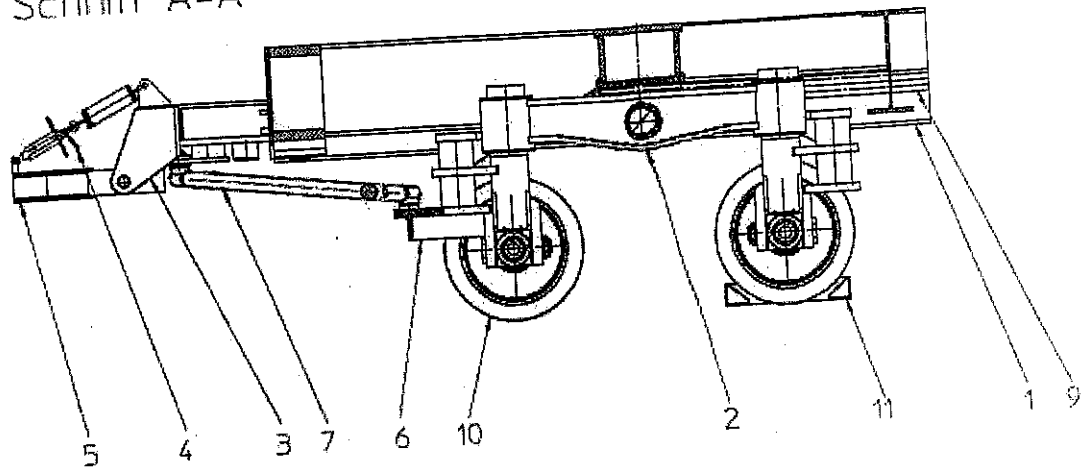

Schnitt B-B

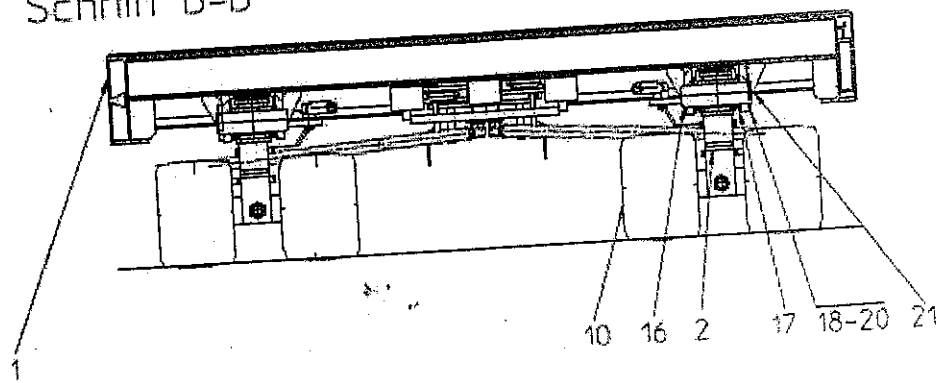

Schnitt C-C

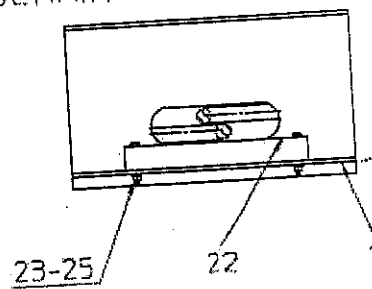

Typical sketch for the locations of 100mm X 100mm flats:

